


ANTARES ACS-425i

Integrated Column Loudspeaker

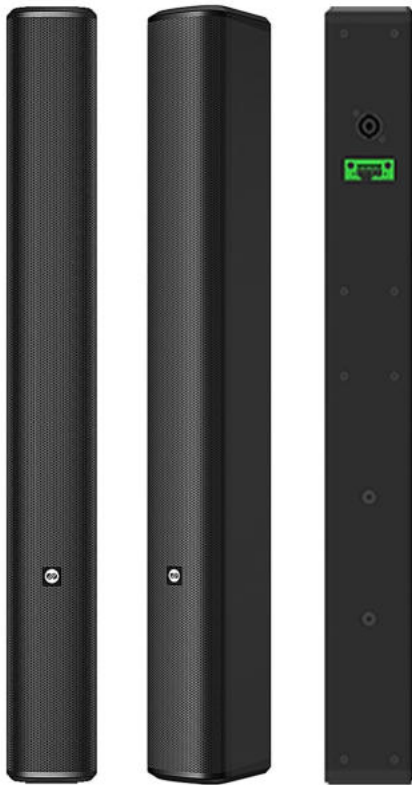

OVERVIEW

The ACS-425i of the Antares Series by Erthpot is a column speaker designed for language sound reinforcement in various settings, including small to medium-sized video conference rooms, digital courts, conference centers, lecture halls, and background music systems in spaces like churches, museums, transportation hubs, and public squares. It solves the issue of bulky, unattractive wall-mounted speakers with a streamlined design in a sophisticated black/white/gray color. The ABS and aluminum alloy reinforced enclosure ensures durability, while the circular waveguide hole offers unique low-frequency cardioid dispersion, delivering crisp treble and full bass. Optional accessories include level and handle devices, and shockproof rubber pads.


TECHNICAL SPECIFICATIONS

Driver unit	4x2.5" neodymium magnet
Rated impedance	4Ω
Rated power	100W (400W, PEAK)
Characteristic sensitivity level (1m/1W)	94dB
MAX SPL	111dB
Frequency range	106Hz~20kHz
Box material	ABS mixed aluminum alloy reinforced box
Grill material	metal mesh
Diffusion angle	Vertical 20°, Horizontal 120°
Mounting hole	2 M6
Mounting system	Adjustable angle mounting bracket or narrow wall distance mounting bracket
Color	Black/White/Gray
Connection method	1 NL4 socket (+1/-1) + 1 Phoenix terminal
Dimensions (height × width × depth):	670x80x100mm
Net weight of product	2.3kg
Packing weight	6.55kg (Pair)

KEY FEATURES

- Suitable for sound amplification in various architectural spaces, providing excellent sound quality
- Sturdy and durable enclosure made of ABS mixed with aluminum alloy
- Circular waveguide hole design for unique low-frequency heart-shaped diffusion
- Crisp and pleasant treble, natural and thick tone, and full bass
- Streamlined design scheme for a subtle and elegant look

Column Speaker Dimensions

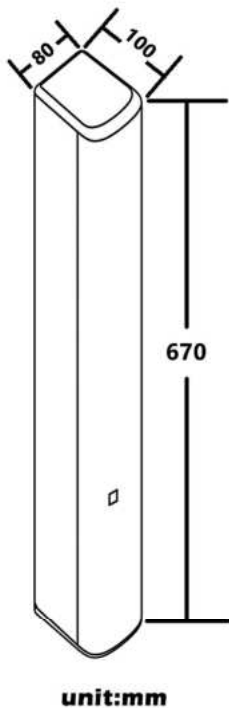

- Bracket -
- Spirit level -
- White gloves (if choose white color) -

APPLICATIONS

- Conference room
- House of worships
- Bars & Cafes
- Lecture Halls
- Concert Halls
- Exclusive shops
- Sport venues
- Retail Malls

ENGINEER AND ARCHITECT SPECIFICATIONS

- Rated Impedance: 4Ω
- Rated Power: 100W RMS (400W PEAK)
- Effective Frequency Range: 106Hz~20KHz
- Characteristic Sensitivity Level (1m/1W): 94dB
- Sound Pressure Level in Specified Frequency Band: 111dB
- Coverage Angle: Vertical 20°, Horizontal 120°
- Dimensions (height × width × depth): 670x80x100mm

Erthpot warrants your product against all defects and factory errors when purchased.

Erthpot stands behind the quality of its products, offering a generous *3-year warranty from the date of retail purchase. During this period, should any defects arise, Erthpot is committed to providing optimal solutions, which include repairing the product with genuine spare parts or replacing it with an equivalent new product*