


ANTARES ACS-925iD

Integrated Column Networked Loudspeaker

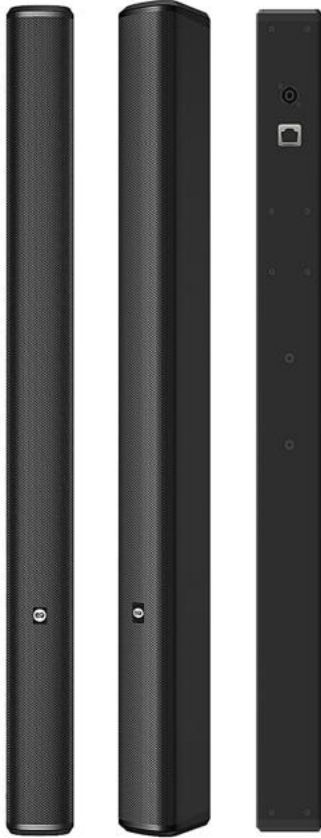

OVERVIEW

The ACS-925iD of the Antares Series by Erthpot is a PoE powered, Dante networked column speaker designed for language sound reinforcement in settings such as video conference rooms, digital courts, conference centers, lecture halls, and background music systems in churches, museums, transportation hubs, and public squares. It addresses the issue of large, unattractive wall-mounted speakers with a streamlined, black/white/gray design. The durable ABS and aluminum alloy enclosure ensures longevity, while the unique circular waveguide delivers crisp treble, natural tone, and full bass. It features a built-in Dante module, DC-AC power conversion, soft switching, bidirectional energy recovery, and precise phase modulation technology.


TECHNICAL SPECIFICATIONS

Driver unit	9x2.5" neodymium magnet.
Rated impedance	4Ω
Rated power	120W
Sensitivity (1m/1W)	92dB
MAX SPL	110dB
Frequency range	95Hz~20kHz
Audio transmission protocol	Dante
Audio routing control	Dante Controller
Protection function	Over current/over temperature/overload/ load short circuit protection
Power input	802.3af/802.3at/802.3bt compatible
Cooling system	Natural convection cooling
Case material	ABS mixed aluminum alloy reinforced case
Grill material	Metal mesh
Diffusion angle	Vertical 20°, Horizontal 120°
Mounting hole	2 M6
Mounting system	Adjustable angle mounting bracket
Color	Black/White/Gray
Connection method	1 RJ45 network port
Dimensions (height × width × depth)	960x80x100mm
Net weight of product	4.15kg
Packing weight	10.45kg (Pair)

KEY FEATURES

- Durable ABS and aluminum alloy enclosure with a unique circular waveguide hole for low-frequency heart-shaped diffusion, delivering crisp treble, natural tone, and full bass.
- Built-in Dante audio transmission module (RJ45), single-stage power conversion (DC-AC), soft switching, and bidirectional energy recovery technologies.
- Precise PSM (phase modulation) technology for accurate sound reproduction.
- Optional installation accessories include a level device, handle device, and shockproof rubber pad.
- Streamlined design scheme, suitable for various architectural spaces, providing high-quality sound.

Column Speaker Dimensions

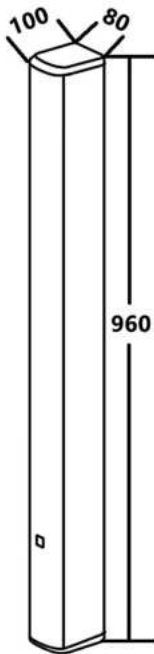

unit:mm

- Bracket -
- Spirit level -
- White gloves (if choose white color) -

APPLICATIONS

- Conference room
- House of worships
- Bars & Cafes
- Lecture Halls
- Concert Halls
- Exclusive shops
- Sport venues
- Retail Malls

ENGINEER AND ARCHITECT SPECIFICATIONS

- Impedance: 4Ω
- Rated Power: 120W
- Characteristic Sensitivity Level (1m/1W): 92dB
- Sound Pressure Level in Specified Frequency Band: 110dB
- Effective Frequency Range: 95Hz~20kHz
- Cabinet Material: ABS mixed with reinforced aluminum alloy
- Grille Material: Metal mesh
- Dispersion Angle: Vertical 20°, Horizontal 120°
- Dimensions (height × width × depth): 960x80x100mm

Erthpot warrants your product against all defects and factory errors when purchased.

Erthpot stands behind the quality of its products, offering a generous *3-year warranty from the date of retail purchase. During this period, should any defects arise, Erthpot is committed to providing optimal solutions, which include repairing the product with genuine spare parts or replacing it with an equivalent new product*